

Profi Gloves Anticut



Professional cut-resistant work gloves.



Properties:

- Integrated kevlar cut-resistant palm filling - tier "5" according to EN388:2016
- Kevlar double-sewn seams to ensure maximum resistance and durability
- Inside made of polyester, including rubberised back of the hand protection
- Outside made of synthetic leather
- Extended elastic cuff preventing dirt from getting inside
- Integrated palm padding, greatly reducing vibrations
- Integrated terry cloth for wiping off sweat during work
- Integrated practical magnet for taking the gloves off

Advantages:


- High tear and cut resistance
- Contact heat resistance
- Excellent and sensitive grip of objects
- Great wearing comfort

Order codes:

Name	Storage code	Package	Volume / Size	Order number
Profi Gloves Anticut L/9	PGA9	1 pair	size 9	10602
Profi Gloves Anticut XL/10	PGA10	1 pair	size 10	10603

Glove type and intended use:

Work gloves of simple construction for normal use according to Government Regulation No 21/2003 Coll. / § 3 / paragraph 2.

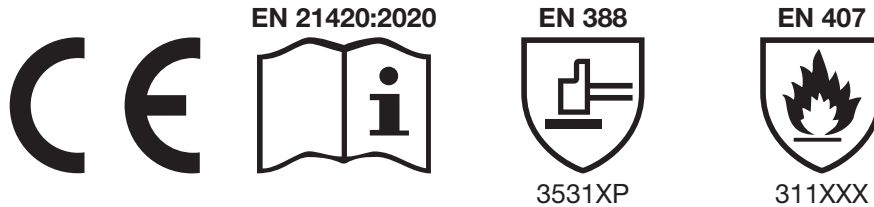

EN 21420:2020

pH = 6,55

EN 388:2016+A1:2018 – 3531XP:

Abrasion resistance (value 0 to 4) = 3
Blade cut resistance (value 0 to 5) = 5
Tear resistance (value 0 to 4) = 3
Puncture resistance (value 0 to 4) = 1
TDM cut resistance (value A to F) = X
Impact resistance (values P, F and X) = P

EN 407 – 311XXX:

Burn resistance (value 0 to 4) = 3
Contact heat resistance (value 0 to 4) = 1
Convective heat resistance (value 0 to 4) = 1
Radiant heat resistance (value 0 to 4) = X
Small metal splatter resistance (value 0 to 4) = X
Large metal splatter resistance (value 0 to 4) = X

Warning:

The gloves are not suitable for handling chemically aggressive substances and objects of temperature above 100 °C.

ONLY FOR PROFESSIONAL AND INDUSTRIAL USE!

Storage:

Store in a dry place in closed packaging at a temperature +5 °C to +35 °C.

Health and Safety:

Please read our Material Safety Data Sheet.

Declaration:

The information and recommendations in this publication are to the best of our knowledge reliable. However nothing herein is to be construed as a warranty or representation. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

Address:

RETECH, s.r.o., Vackova 1541/4; Praha 5 - Stodůlky; Czech Republic
Contact address: 285 02 Suchdol u Kutné Hory cp. 212; tel./fax: +420 327 596 128; e-mail: info@retech.cz